




Rv 4625

- Rv - Round holes, staggered
- Hole diameter 4.6 mm
- Free cross section 25 %

Max. perforation width 949.6 mm
 Max. tool width 1'080 mm

Material thickness steel 0.5 - 0.7 mm
 Material thickness aluminium 0.6 - 1.0 mm

Chart acc. EN 20 354
 α_w weighted sound absorption coefficient acc. ISO EN 11654
 NRC acc. ASTM C 423-90a

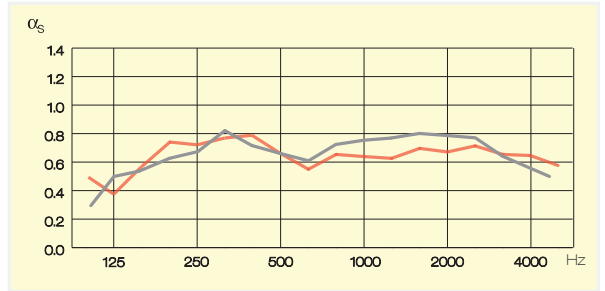

Sound absorption values		NRC	α_w
	Acoustical fleece VLS 63 g/m ² , bonded over the whole surface of one side, suspension height 350 mm No. 4396-00-1 (16)	0.65	0.70
	AMPK 25 kg/m ³ , 20 mm suspension height 350 mm No. 4396-00-1 (11)	0.70	0.70

